



NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:  
SLIDE: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS.


CONTACT BLADE: NICKEL SILVER ALLOY 770.  
SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:

MAXIMUM CURRENT: 5 AMPS  
MAXIMUM VOLTAGE: 0 V  
MAXIMUM TEMPERATURE: 200°F (93°C)

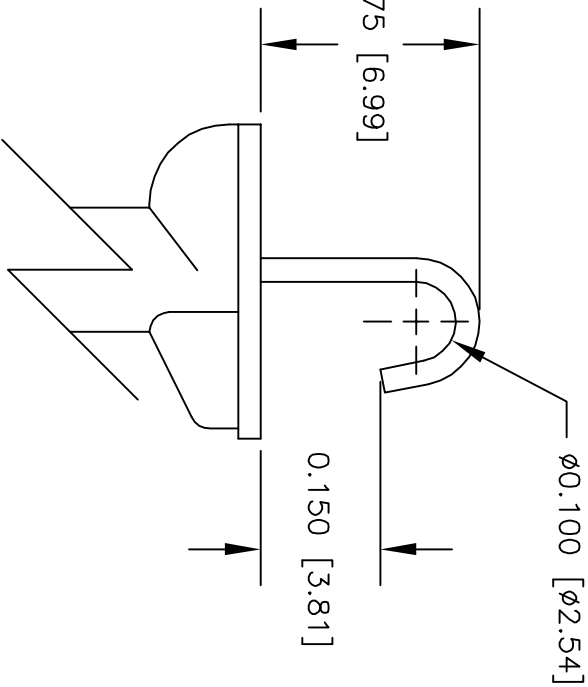

ACTUAL SIZE HOOK DETAIL  
SCALE: 4:1

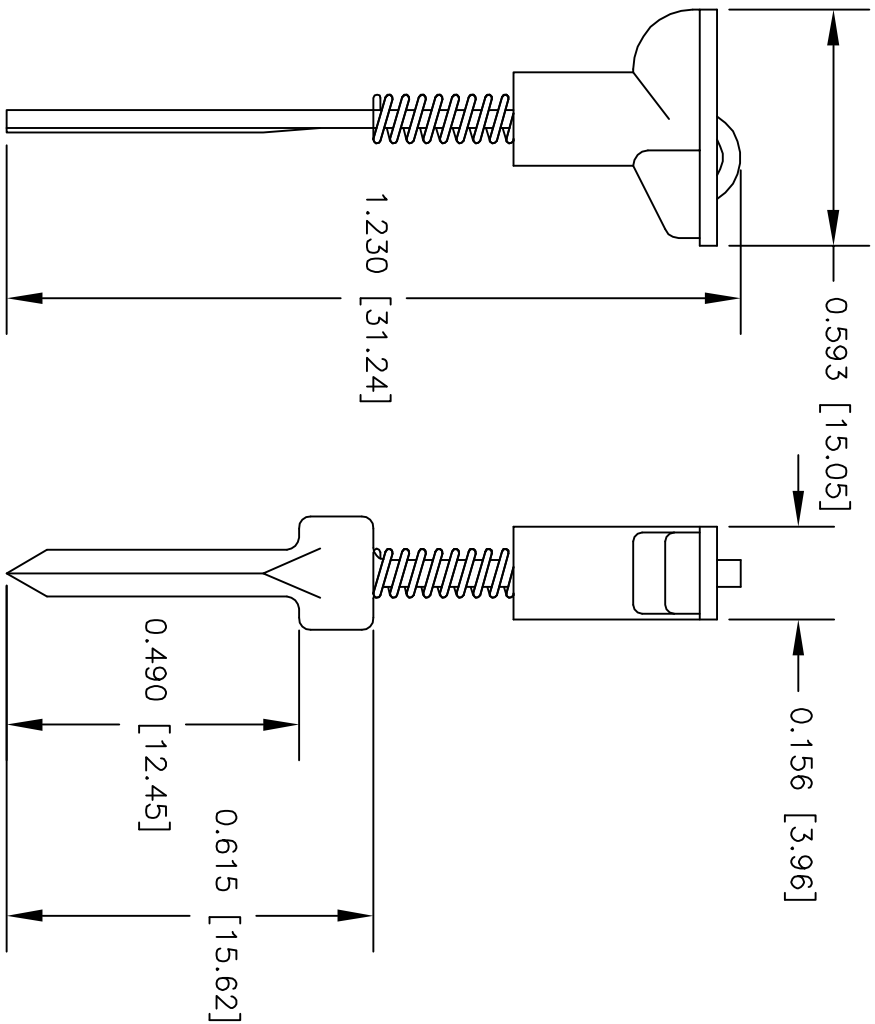

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCES ARE: FRACTIONS DECIMALS ANGLES  
± .XX ± ± .XXX ±

MATERIAL SEE NOTE.

FINISH SEE NOTE.

APPLICATION USED ON DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS	DATE
R.L.	11/10
APPROVED BY	

**E-Z-HOOK** DIVISION OF TEKTEST INC.  
ARCADIA, CA 91006 U.S.A.

DESCRIPTION  
STD TEST TERMINAL

SIZE	CODE IDENT NO.	DRAWING NO.	REV.
A	08505	81-1	
SCALE	1:1	SHEET 1 OF 1	

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.