


Restricted to: General Release

USED ON

THIS DRAWING IS A CONTROLLED DOCUMENT 627877

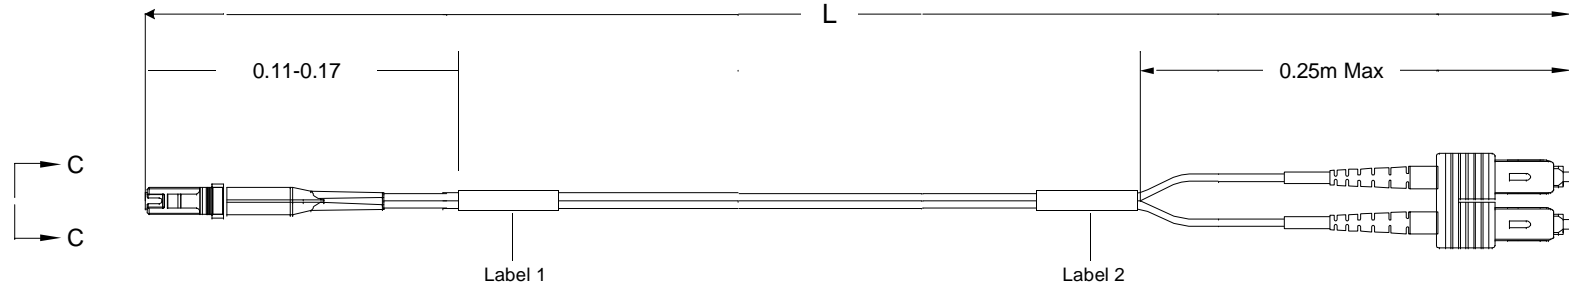

**Left Side**

Connector(s): MT-RJ SECURE (No Pins)  
 Mode: MM  
 Housing Color: Red  
 Geom. Spec: 115-1215

**Fiber Path**


Fiber A - - B  
 Fiber B - - A

**Right Side**

Connector(s): SC-Duplex  
 Mode: MM  
 Housing Color: Beige  
 Geom. Spec: N/A

**Notes:**

- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
- 2 Label 2 will not be present on any cable assembly less than 5 meters long.
- 3 Includes dust caps (not shown on print).
- 4 IL tested at 1300nm.



VIEW C-C  
NOT TO SCALE

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS, INC. IT IS THE PROPERTY OF TYCO ELECTRONICS, INC. AND IS NOT TO BE DISCLOSED TO ANY OTHER PARTY WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC  
 CE  
 DIST  
 16

B1	Rev Per EC#	MINOR REVISION	9/25/2006	-	MK
P	LTR	REVISION RECORD	DATE	DN	APVD

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± .
	1 PLC ± .
	2 PLC ± .
	3 PLC ± .
	4 PLC ± .

DRN	Cable Assy Configurator	MATERIAL	HEAT TREAT
CHK	Michael Kepko		
APVD	Michael Kepko	<b>AMP</b> Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to SC-Duplex		
SCALE	NTS	SIZE	A2
DRAWING NO	C- 6278877		SHEET
			1 of 3
			REV
			B1

Customer Print

8                                      7                                      6                                      5                                      4                                      3                                      2                                      1

Restricted to: General Release

USED ON

THIS DRAWING IS A CONTROLLED DOCUMENT.


Part #	L (meters)	L (feet)	MT-RJ SECURE (No Pins), Red		SC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
0-6278877-1	0.950 - 1.050	3.11 - 3.44	0.5	20	0.5	-
0-6278877-2	1.950 - 2.050	6.39 - 6.72	0.5	20	0.5	-
0-6278877-3	2.950 - 3.050	9.67 - 10.00	0.5	20	0.5	-
0-6278877-4	3.920 - 4.080	12.86 - 13.38	0.51	20	0.51	-
0-6278877-5	4.920 - 5.080	16.14 - 16.66	0.51	20	0.51	-
0-6278877-6	5.920 - 6.080	19.42 - 19.94	0.51	20	0.51	-
0-6278877-7	6.920 - 7.080	22.70 - 23.22	0.51	20	0.51	-
0-6278877-8	7.920 - 8.080	25.98 - 26.50	0.51	20	0.51	-
0-6278877-9	8.850 - 9.150	29.03 - 30.01	0.51	20	0.51	-
1-6278877-0	9.850 - 10.150	32.31 - 33.30	0.52	20	0.52	-
1-6278877-1	10.850 - 11.150	35.59 - 36.58	0.52	20	0.52	-
1-6278877-2	11.850 - 12.150	38.87 - 39.86	0.52	20	0.52	-
1-6278877-3	12.850 - 13.150	42.15 - 43.14	0.52	20	0.52	-
1-6278877-4	13.850 - 14.150	45.43 - 46.42	0.52	20	0.52	-
1-6278877-5	14.850 - 15.150	48.72 - 49.70	0.52	20	0.52	-
1-6278877-6	15.840 - 16.160	51.96 - 53.01	0.52	20	0.52	-
1-6278877-7	16.830 - 17.170	55.21 - 56.33	0.53	20	0.53	-
1-6278877-8	17.820 - 18.180	58.46 - 59.64	0.53	20	0.53	-
1-6278877-9	18.810 - 19.190	61.71 - 62.95	0.53	20	0.53	-
2-6278877-0	19.800 - 20.200	64.96 - 66.27	0.53	20	0.53	-
2-6278877-1	20.790 - 21.210	68.20 - 69.58	0.53	20	0.53	-
2-6278877-2	21.780 - 22.220	71.45 - 72.90	0.53	20	0.53	-
2-6278877-3	22.770 - 23.230	74.70 - 76.21	0.53	20	0.53	-
2-6278877-4	23.760 - 24.240	77.95 - 79.52	0.54	20	0.54	-
2-6278877-5	24.750 - 25.250	81.20 - 82.84	0.54	20	0.54	-
2-6278877-6	25.740 - 26.260	84.44 - 86.15	0.54	20	0.54	-
2-6278877-7	26.730 - 27.270	87.69 - 89.46	0.54	20	0.54	-
2-6278877-8	27.720 - 28.280	90.94 - 92.78	0.54	20	0.54	-
2-6278877-9	28.710 - 29.290	94.19 - 96.09	0.54	20	0.54	-
3-6278877-0	29.700 - 30.300	97.44 - 99.40	0.55	20	0.55	-
3-6278877-1	30.690 - 31.310	100.68 - 102.72	0.55	20	0.55	-
3-6278877-2	31.680 - 32.320	103.93 - 106.03	0.55	20	0.55	-
3-6278877-3	32.670 - 33.330	107.18 - 109.35	0.55	20	0.55	-
3-6278877-4	33.660 - 34.340	110.43 - 112.66	0.55	20	0.55	-
3-6278877-5	34.650 - 35.350	113.68 - 115.97	0.55	20	0.55	-
3-6278877-6	35.640 - 36.360	116.92 - 119.29	0.55	20	0.55	-
3-6278877-7	36.630 - 37.370	120.17 - 122.60	0.56	20	0.56	-
3-6278877-8	37.620 - 38.380	123.42 - 125.91	0.56	20	0.56	-
3-6278877-9	38.610 - 39.390	126.67 - 129.23	0.56	20	0.56	-
4-6278877-0	39.600 - 40.400	129.92 - 132.54	0.56	20	0.56	-
5-6278877-0	49.500 - 50.500	162.40 - 165.68	0.58	20	0.58	-

Qty	U of M	Description	Item No.
1	piece	DUST COVER, MT-RJ	1
1	piece	SPRING, MT-RJ, 3.8 DESIGN	2
1	piece	PIN KEEPER, 3.8MM	3
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	4
1	piece	CRIMP EYELET, MT-RJ	5
1	piece	MT-RJ Keyed Connector Housing - Red	6
2	piece	LC, SC, FC Straight Boot, Beige	7
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	8
2	piece	SC Simplex Housing, Beige	9
2	piece	2.5mm ferrule cover	10
AR	meter	2 fiber, 50/125, 1.8 mm, Twinzip, Orange, OFNR (Riser)	11
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	12
2	piece	SC Duplex Clip	13
2	piece	Eyelet/Shrink tube assembly - White	14
2	piece	CONN SUBASSY, MM, SC 1.6MM	15
2	piece	Trace Label	16

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC  
CE  
DIST  
16

B1	Rev Per EC#	MINOR REVISION	9/25/2006	-	MK
P	LTR	REVISION RECORD	DATE	DN	APVD



DIMENSIONS:  
meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 P.L.C ± -  
 1 P.L.C ± -  
 2 P.L.C ± -  
 3 P.L.C ± -  
 4 P.L.C ± -

Customer Print

DIN Cable Assy Configurator		MATERIAL	HEAT TREAT
OK	Michael Kepko		
APVD	Michael Kepko	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to SC-Duplex			
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 6278877	2 of 3
			REV B1

CAC Customer Layout Rev: D

8

7

6

5

4

3

2

1

D

C

B

A

**Label 1** Per specification 107-1645-1

Trace # - Bar Code  
 Trace # - Human Readable  
 Part Number  
 Country of Origin

**This label is used on all lengths on this drawing.**

**Label 2** Per specification 107-1645-1

Trace # - Bar Code  
 Trace # - Human Readable  
 Part Number  
 Country of Origin

**This label is used on all lengths on this drawing.**

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY BY PERSONNEL WHO HAVE BEEN AUTHORIZED BY TYCO ELECTRONICS CORPORATION. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC  
CE  
DIST  
16

B1	Rev Per	EC#	MINOR REVISION	9/25/2006	-	MK	
P	LTR		REVISION RECORD	DATE	DIN	APVD	

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±

Customer Print

DIN	Cable Assy Configurator	MATERIAL	HEAT TREAT
OK	Michael Kepko		
APVD	Michael Kepko	Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to SC-Duplex		
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 6278877	3 of 3
			REV
			B1