
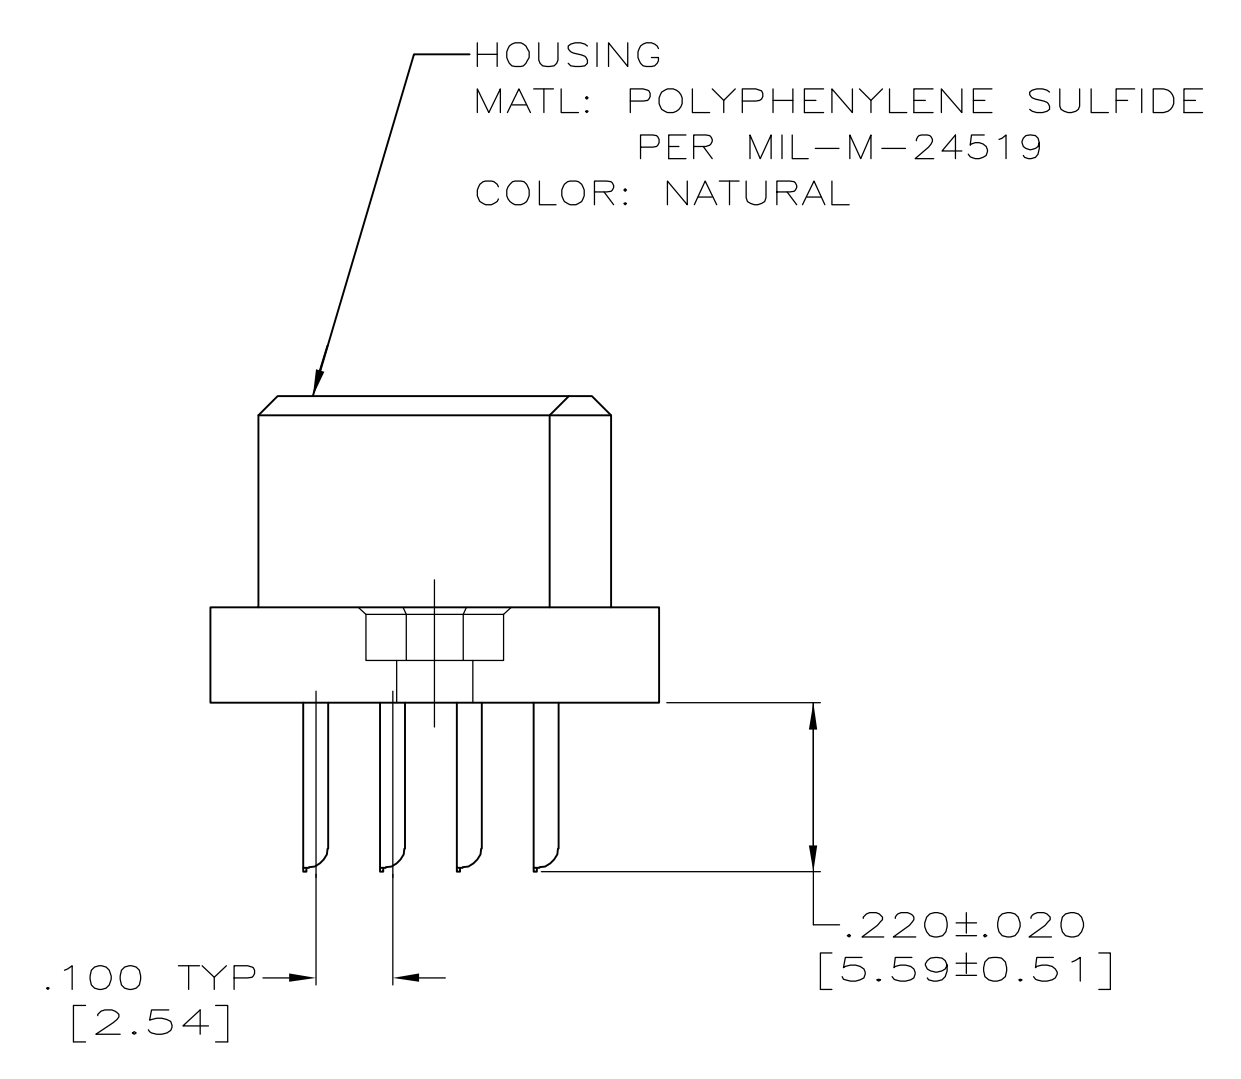


△ 1 KEY POSITION IDENTIFICATIONS MOLDED ON SURFACES SHOWN.  
 △ 2 FINISH: PLATED GOLD .000050[.00127] THK PER MIL-G-45204 IN CONTACT AREA, TAILS PLATED TIN-LEAD; ALL OVER NICKEL PER QQ-N-290.

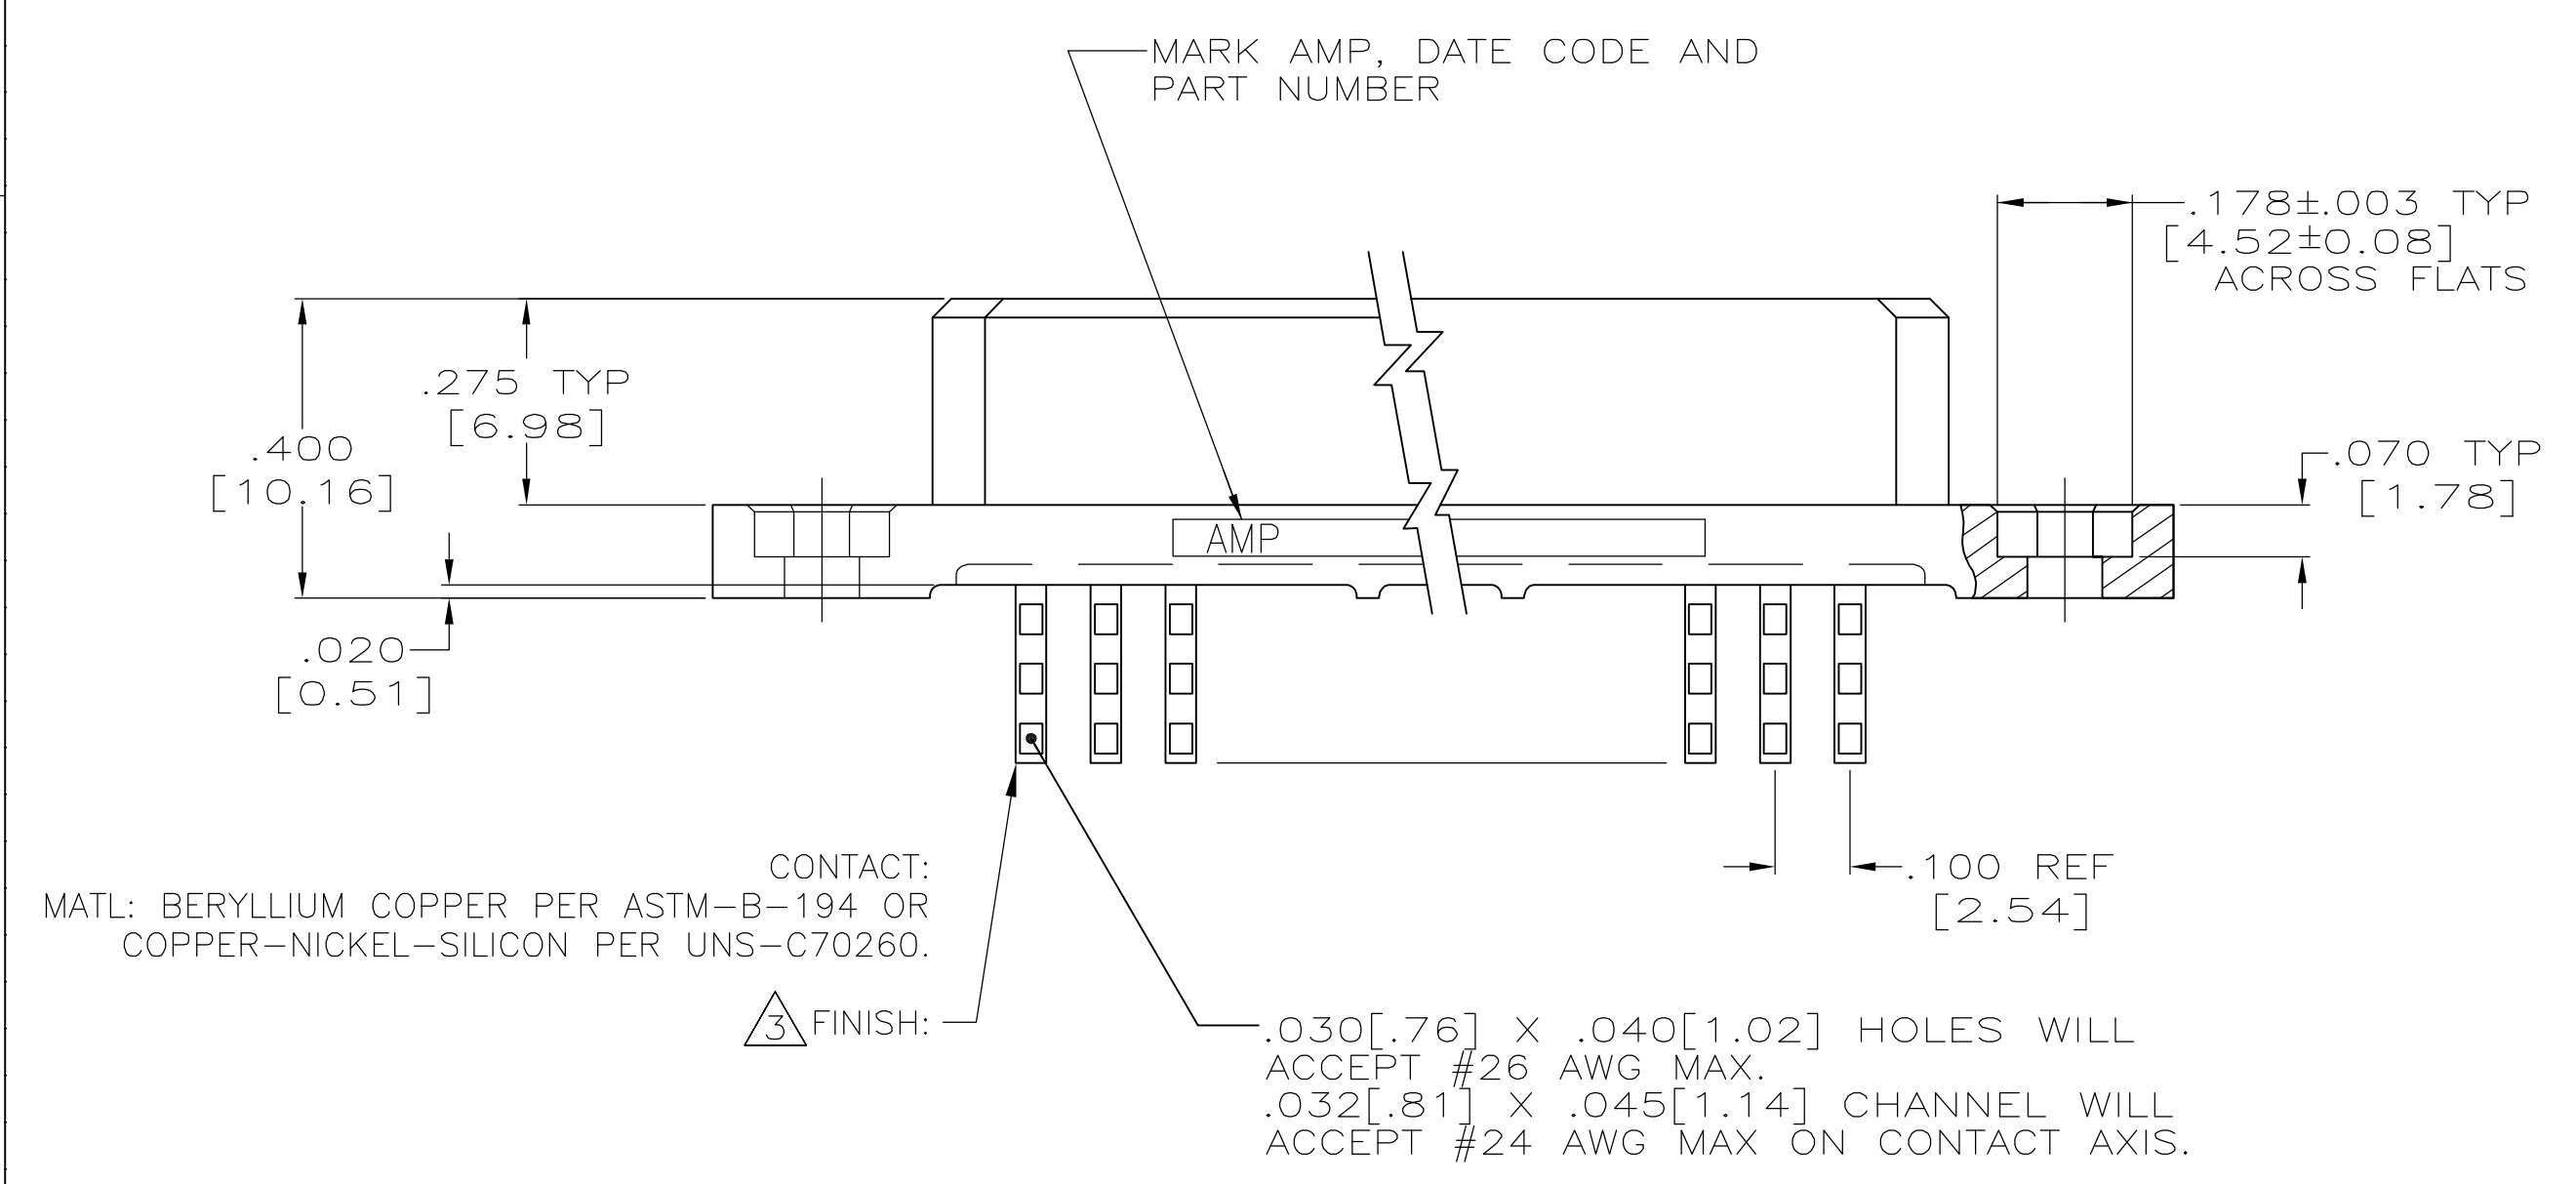

CONTACT: MATL: BERYLLIUM COPPER PER ASTM-B-194 OR COPPER-NICKEL-SILICON PER UNS-C70260.  
 △ 3 FINISH: .030[.76] X .040[1.02] HOLES WILL ACCEPT #26 AWG MAX. .032[.81] X .045[1.14] CHANNEL WILL ACCEPT #24 AWG MAX ON CONTACT AXIS.

4.900 [124.46]	49	5.024 [127.61]	5.450 [138.43]	5.750 [146.05]	200	443796-2
5.400 [137.16]	54	5.524 [140.31]	5.950 [151.13]	6.250 [158.75]	220	443796-1
E	D	C	B	A	POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN T. ALEXANDER 2-8-96	Tyco Electronics Corporation Harrisburg, PA 17105-3608
CHK D. MILLER 2-8-96	
APP'D D. MILLER 2-8-96	NAME
PRODUCT SPEC	RECEPTACLE ASSEMBLY, FOUR ROW BOX, SOLDER EYELET CONTACT
APPLICATION SPEC	RESTRICTED TO
WEIGHT	SIZE CAGE CODE DRAWING NO
SEE CALLOUT	A1 00779 C=443796
SEE CALLOUT	CUSTOMER DRAWING

SCALE 4:1 SHEET 1 OF 1 REV A